查询BUF420M供应商

BUF420M

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR

- STMicroelectronics PREFERRED SALESTYPE
- HIGH VOLTAGE CAPABILITY
- VERY HIGH SWITCHING SPEED
- MINIMUM LOT-TO-LOT SPREAD FOR RELIABLE OPERATION
- LOW BASE-DRIVE REQUIREMENTS

APPLICATIONS:
- SWITCH MODE POWER SUPPLIES
- MOTOR CONTROL

DESCRIPTION

The BUF420M is manufactured using High Voltage Multi Epitaxial Planar technology for high switching speeds and high voltage capacity. It uses a Cellular Emitter structure with planar edge termination to enhance switching speeds while maintaining a wide RBSOA.

The BUF series is designed for use in high-frequency power supplies and motor control applications.



TO-3
(version "R")

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CEV}	Collector-Emitter Voltage (V_{BE} = -1.5V)	850	V
V_{CEO}	Collector-Emitter Voltage (I_B = 0)	450	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	7	V
I_C	Collector Current	30	A
I_{CM}	Collector Peak Current (t_p < 5 ms)	60	A
I_B	Base Current	6	A
I_{BM}	Base Peak Current (t_p < 5 ms)	9	A
P_{tot}	Total Dissipation at T_c = 25 °C	275	W
T_{stg}	Storage Temperature	-65 to 200	°C
T_j	Max. Operating Junction Temperature	200	°C

THERMAL DATA

$R_{thj\text{-}case}$	Thermal Resistance Junction-Case	Max	0.63	$^oC/W$

ELECTRICAL CHARACTERISTICS (T_{case} = 25 ^oC unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER}	Collector Cut-off Current (R_{BE} = 5 Ω)	V_{CE} = 850 V V_{CE} = 850 V T_C = 100 ^oC			0.2 1	mA mA
I_{CEV}	Collector Cut-off Current (V_{BE} = -1.5V)	V_{CE} = 850 V V_{CE} = 850 V T_C = 100 ^oC			0.2 1	mA mA
I_{EBO}	Emitter Cut-off Current (I_C = 0)	V_{EB} = 5 V			1	mA
$V_{CEO(sus)}$*	Collector-Emitter Sustaining Voltage (I_B = 0)	I_C = 200 mA L = 25 mH	450			V
V_{EBO}	Emitter Base Voltage (I_C = 0)	I_E = 50 mA	7			V
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 10A I_B = 1 A I_C = 10 A I_B = 1 A T_C =100^oC I_C = 20 A I_B = 4 A I_C = 20 A I_B = 4 A T_C =100^oC		0.8 0.5 	 2.8 2	V V V V
$V_{BE(sat)}$*	Base-Emitter Saturation Voltage	I_C = 10A I_B = 1 A I_C = 10 A I_B = 1 A T_C =100^oC I_C = 20 A I_B = 4 A I_C = 20 A I_B = 4 A T_C =100^oC		0.9 1.1 	 1.5 1.5	V V V V
di_c/dt	Rate of rise on-state Collector Current	V_{CC} = 300 V R_C = 0 t_p = 3 µs I_{B1} = 1.5 A T_C =25^oC I_{B1} = 1.5 A T_C =100^oC I_{B1} = 6 A T_C =100^oC	 70 150	 100 	 	 A/µs A/µs A/µs
V_{CE}(3µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 300 V R_C = 60 Ω I_{B1} = 1.5 A T_C =25^oC I_{B1} = 1.5 A T_C =100^oC		 2.1 	 8	 V V
V_{CE}(5µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 300 V R_C = 60 Ω I_{B1} = 1.5 A T_C =25^oC I_{B1} = 1.5 A T_C =100^oC		 1.1 	 4	 V V
 t_s t_f t_c	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	I_C = 10 A V_{CC} = 50 V V_{BB} = - 5 V R_{BB} = 0.6 Ω V_{clamp} = 400 V I_{B1} = 1 A L = 0.25 mH		 1 0.05 0.08	 	 µs µs µs
 t_s t_f t_c	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	I_C = 10 A V_{CC} = 50 V V_{BB} = - 5 V R_{BB} = 0.6 Ω V_{clamp} = 400 V I_{B1} = 1 A L = 0.25 mH T_C =100^oC			 2 0.1 0.18	 µs µs µs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	I_C = 10 A V_{CC} = 50 V V_{BB} = - 5 V R_{BB} = 0.6 Ω I_{B1} = 1 A L = 0.25 mH T_C =125^oC	500			V
 t_s t_f t_c	INDUCTIVE LOAD Storage Time Fall Time Cross Over Time	I_C = 10 A V_{CC} = 50 V V_{BB} = 0 R_{BB} = 0.15 Ω V_{clamp} = 400 V I_{B1} = 1 A L = 0.25 mH		 1.5 0.04 0.07	 	 µs µs µs

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
	INDUCTIVE LOAD	I_C = 10 A	V_{CC} = 50 V				
t_s	Storage Time	V_{BB} = 0	R_{BB} = 0.15 Ω			3	µs
t_f	Fall Time	V_{clamp} = 400 V	I_{B1} = 1 A			0.15	µs
t_c	Cross Over Time	L = 0.25 mH	T_C =100°C			0.25	µs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	I_C = 10 A V_{BB} = 0 I_{B1} = 1 A T_C =125°C	V_{CC} = 50 V R_{BB} = 0.15 Ω L = 0.25 mH	500			V
	INDUCTIVE LOAD	I_C = 20 A	V_{CC} = 50 V				
t_s	Storage Time	V_{BB} = -5 V	R_{BB} =0.6 Ω		2.2		µs
t_f	Fall Time	V_{clamp} = 400 V	I_{B1} = 4 A		0.06		µs
t_c	Cross Over Time	L = 0.12 mH			0.12		µs
	INDUCTIVE LOAD	I_C = 20 A	V_{CC} = 50 V				
t_s	Storage Time	V_{BB} = - 5 V	R_{BB} = 0.6 Ω			3.5	µs
t_f	Fall Time	V_{clamp} = 400 V	I_{B1} = 4 A			0.12	µs
t_c	Cross Over Time	L = 0.12 mH	T_C =125°C			0.3	µs
V_{CEW}	Maximum Collector Emitter Voltage without Snubber	I_{CWoff} = 30 A V_{BB} = - 5 V L = 0.12 mH T_C =125°C	V_{CC} = 50 V R_{BB} = 0.6 Ω I_{B1} = 6 A	400			V

DC Current Gain

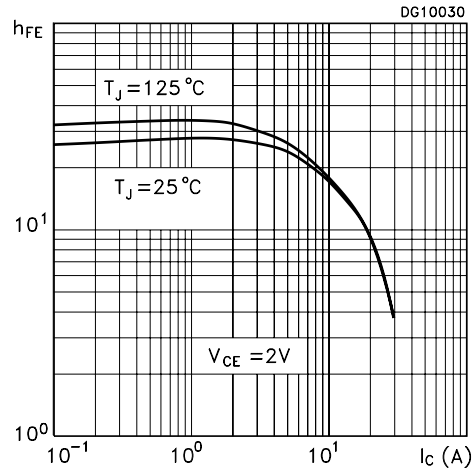

DC Current Gain

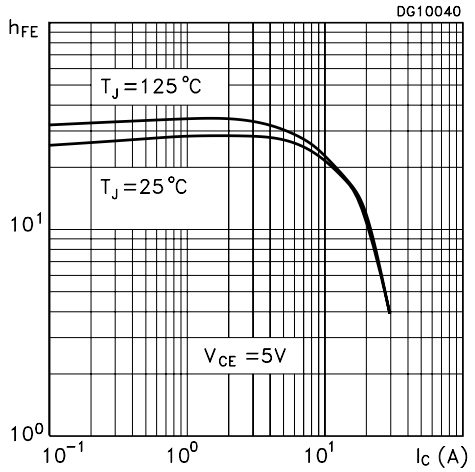

Collector Emitter Saturation Voltage

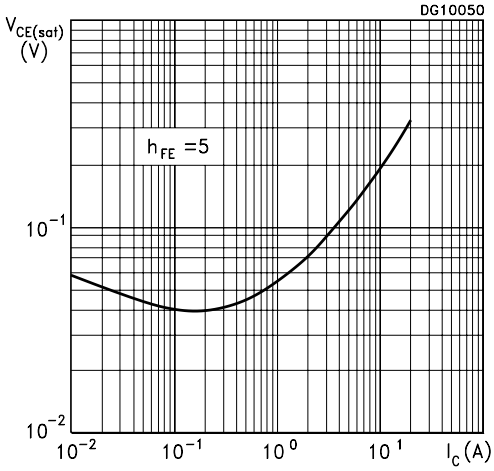

Base Emitter Saturation Voltage

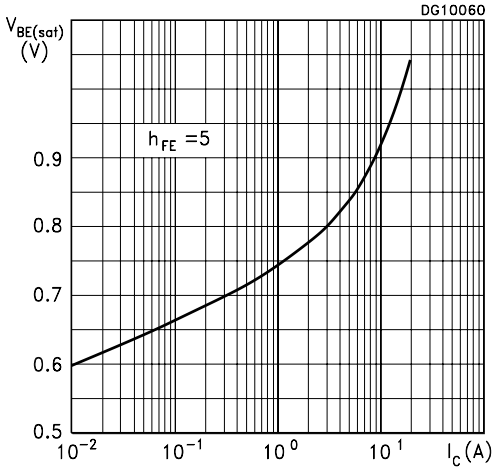

Forward Biased Safe Operating Area

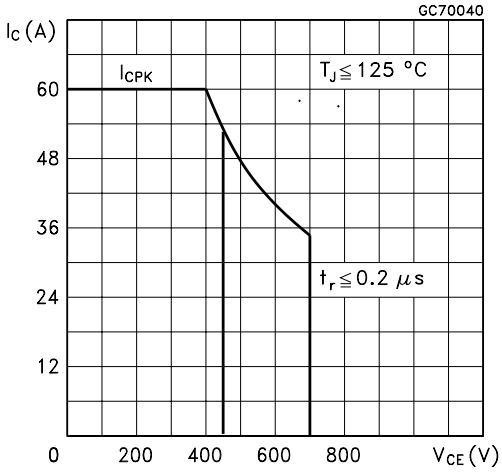

Reverse Biased Safe Operating Area

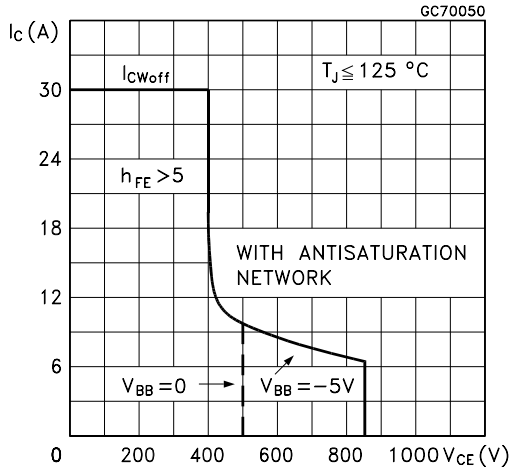

Storage Time Versus Pulse Time.

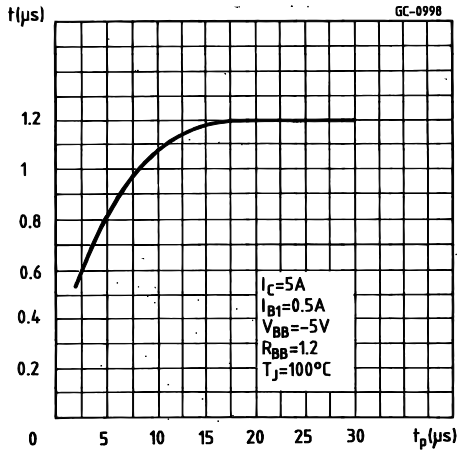

Figure 1: Inductive Load Switching Test Circuit.

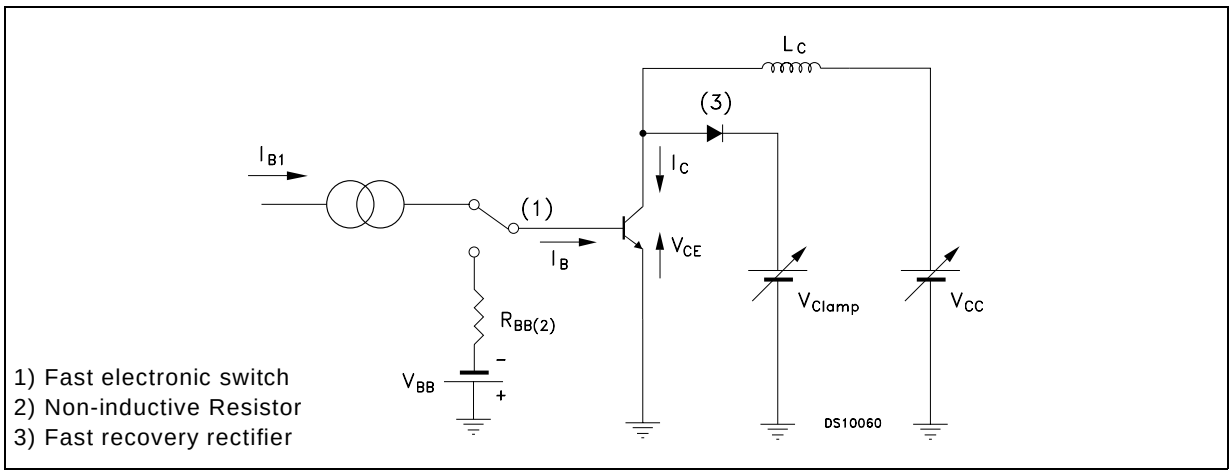

Turn-on Switching Test Waveforms.

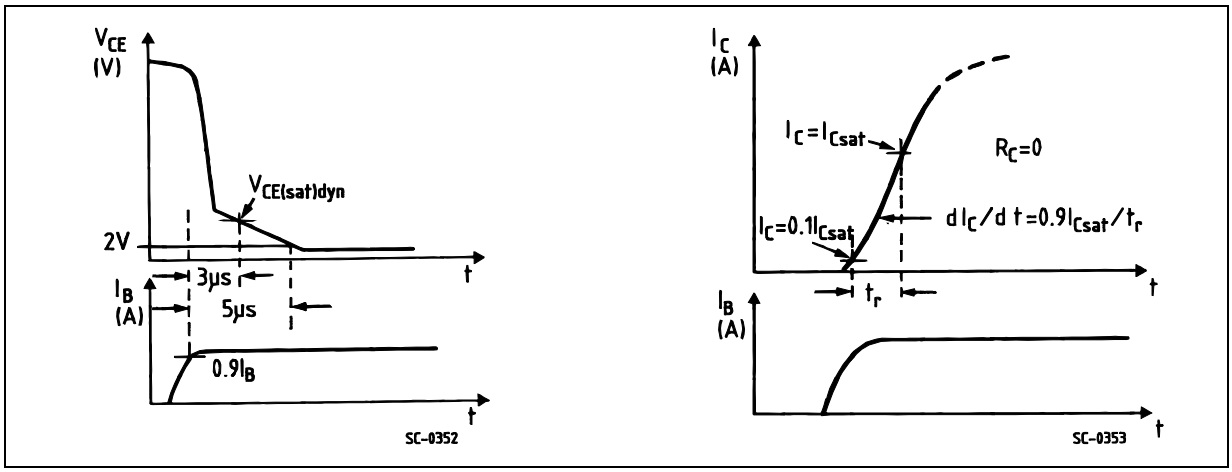

Turn-off Switching Test Waveforms (inductive load).

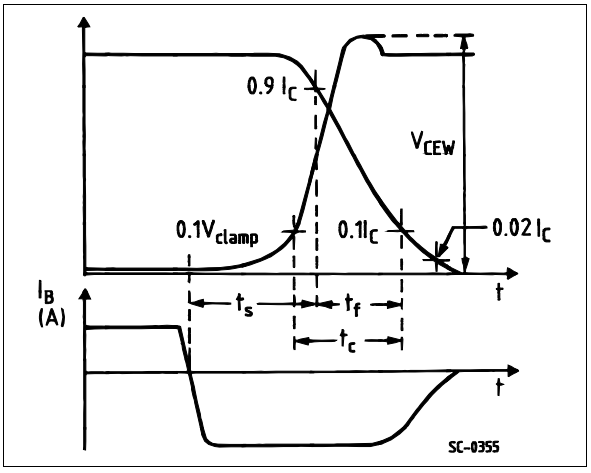

TO-3 (version R) MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		11.7			0.460	
B	0.96		1.10	0.037		0.043
C			1.70			0.066
D			8.7			0.342
E			20.0			0.787
G		10.9			0.429	
N		16.9			0.665	
P			26.2			1.031
R	3.88		4.09	0.152		0.161
U			39.50			1.555
V		30.10			1.185	

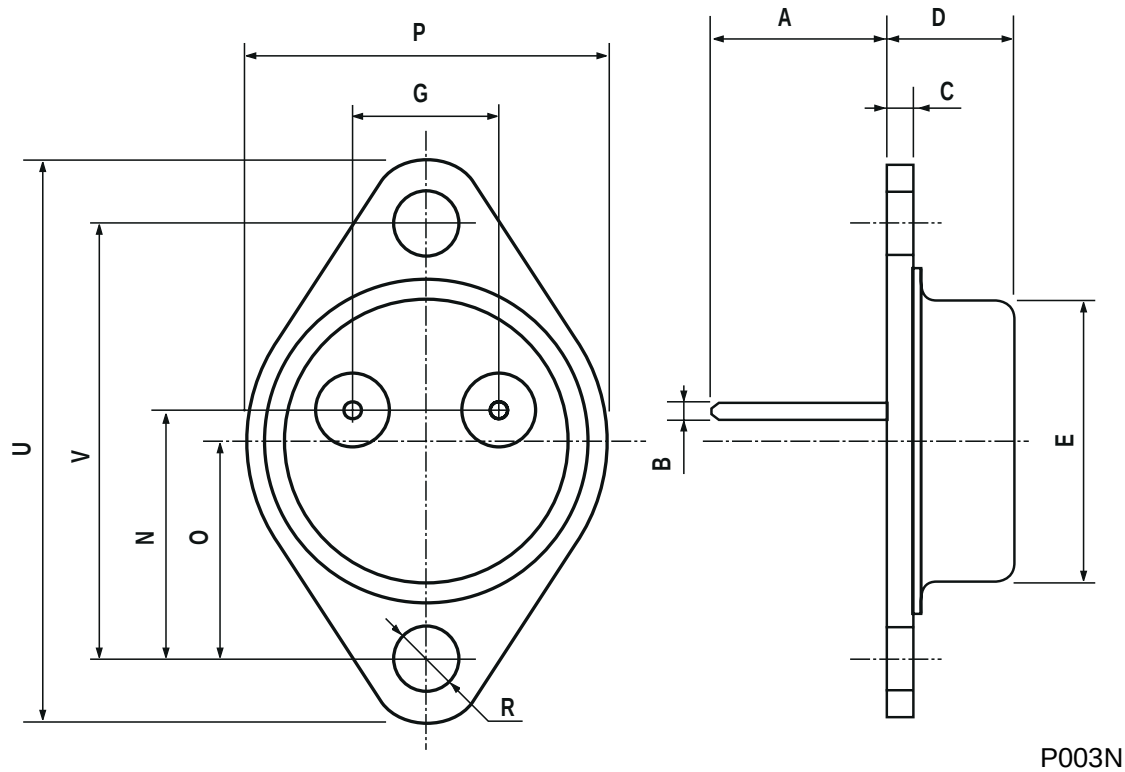

P003N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2002 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com